IS-2U50PD8

2U 500W 80 Plus High Efficiency Power Supply



Features

- 80 Plus High Efficiency and Reliability
- 16ms Hold Up Time
- Over Current Protection
- · Over Voltage Protection
- · Short Circuit Protection
- · Low Noise and Thermal-controlled Fan

Specifications

| Model Number | Efficiency |
|-----------------|--|
| IS-2U50PD8 | Min 80% |
| RoHS Compliance | Connector Type |
| YES | Main Connector :: 24 pin/ 4pin 12V :: 1/ 8pin EPS 12V :: 1/ Molex :: 4 SATA :: 2/ Floppy :: 1 |
| Output Wattage | Dimensions (WxHxD) |
| 500 | Width 3.94" (100.1 mm) Height 2.76" (70.1 mm) Depth 7.87" (199.9 mm) |

Front View Side View Rear View








We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.



IS-2U50PD8

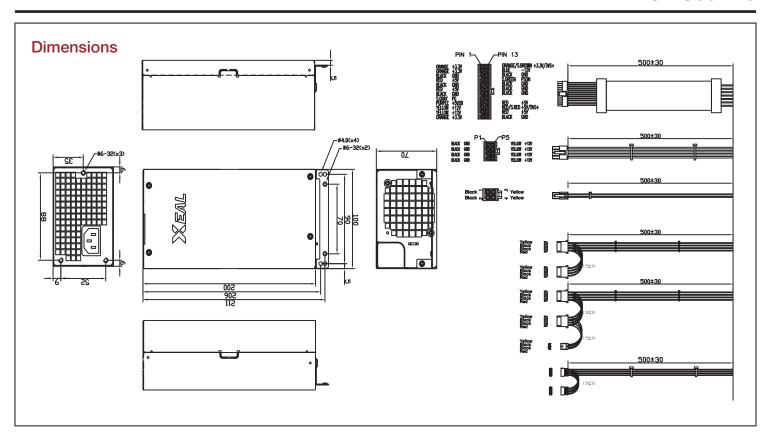

Compatible Chassis

 * Please visit our website www.istarusa.com/en/xeal for a full list of compatible chassis

Output Rating

| Output Voltage | +5V | +3.3V | +12V (Single Rail) | -12V | +5VSB | |
|-------------------|------|-------|--------------------|------|-------|--|
| Max. Load | 24A | 24A | 41A | 0.8A | 3A | |
| Min. Load | 0.5A | 0.5A | 1A | 0A | 0A | |
| Max. Combined | 140W | | 492W | 6W | 15W | |
| Total Output | 500W | | | | | |

