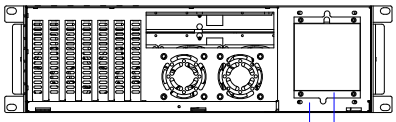

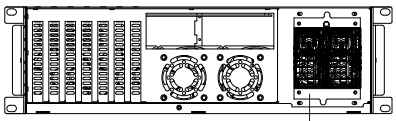

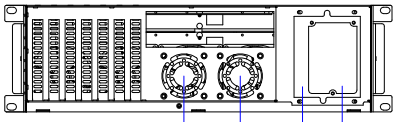

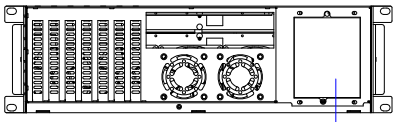



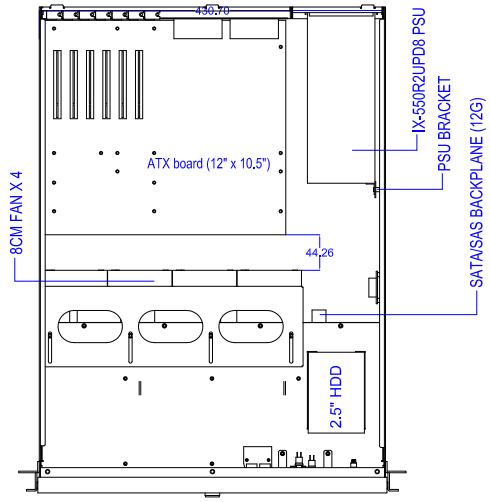

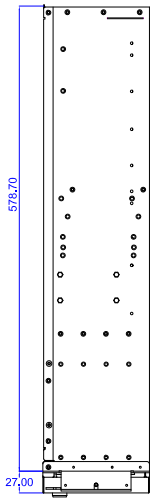

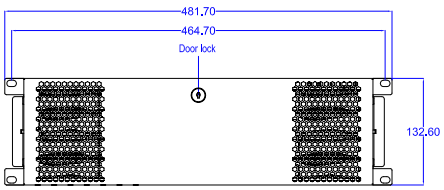

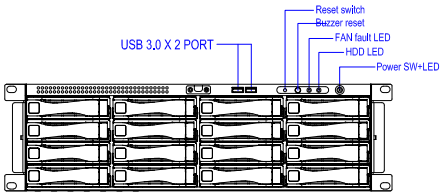

Open Door

REVISIONS

REV.	DESCRIPTION	DATE	BY

Model No.	U-316SS
RoHS Compliance	Yes
Form factor	3U
Standard Drive Bays	2.5" Drive (internal): 1 Hotswap 3.5": 16
Hotswap HDD Type	2.5" & 3.5" SAS I/II/III/4 & SATA I/II/III
Indicators	Power + Fan Failure + HDD LED
Switches	Power, Reset, Mute
Expansion Slots	x 7 (Standard)
Material of Handle	Heavy-duty SGCC Cold-rolled Steel
Material of Main Chassis	Heavy-duty SGCC Cold-rolled Steel
Motherboard Size	12" x 10.5" (ATX, microATX)
Cooling Fan	4x80mm + 2x60mm
Dimensions(W x H x D)	19.00" x 5.22" x 22.78" 482.0mm x 132.6mm x 578.7mm
Backplane Type	SFF-8087 6Gb/s

Sliding Rail

R-201

1,

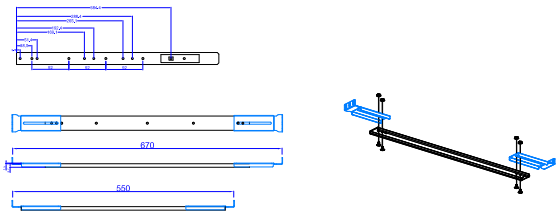

2, RP-RAIL-26-1UB

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ISTARUSA GROUP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ISTARUSA GROUP IS PROHIBITED.

NEXT ASSY	USED ON
BY	UA

DIMENSIONS ARE IN MM
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±

MATERIAL

FINISH

	NAME	DATE
DRAWN		
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		

COMMENTS:

iStarUSA®

U-316SS

SIZE	DWG. NO.	REV.
A	Draw1	
SCALE:1:1	WEIGHT:	SHEET 1 OF 1