

# WO Series

## 4 Post Simple Open Rack



### Features

- Open Frame Construction Enables Quick Access to Rackmount System
- Easy to Transport with Rolling Caster
- Manufactured in Accordance with ANSI / EIA RS-310-D, IEC297-2, DIN41491 (PART 1), DIN41494 (PART7) and GB / T3047.2-921 Standards
- Modular Design, Easily Assemble and Disassemble For Logistic and Relocation of Cabinet to Enable Cost-Effective Solution
- Locking Mechanism Design on Casters
- Comes with M6 Mounting Screws and Cage Nuts

### Specifications

<b>RoHS Compliance</b>	<b>Loading Capacity</b>
Yes	330 lbs
<b>Industry Standard</b>	<b>Notes</b>
ANSI/EIA RS-310D, DIN41491, PART1, IEC297-2, PART7, GB/T3047.2-92	"Comes with 20 sets of M6 hex screws and cage nuts Not compatible with HP/ DELL/ IBM servers equipped with sliding rails"

### Optional Accessories

Model Number	Description	Model Number	Description
WA-CM1UB	1U Cable Management Rack Kit	WA-SFR96B	Heavy Duty Sliding Tray
WA-LB96B	Cabinet Supporting Bar	TC-RAIL	TC Sliding Rail Kit
WA-PD010	10 Outlet Overload Circuit Breaker Protection Power Distribution Unit		

### Front View



### Inside View






### Rear View



We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

Dimensions

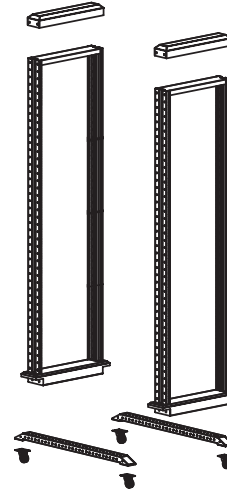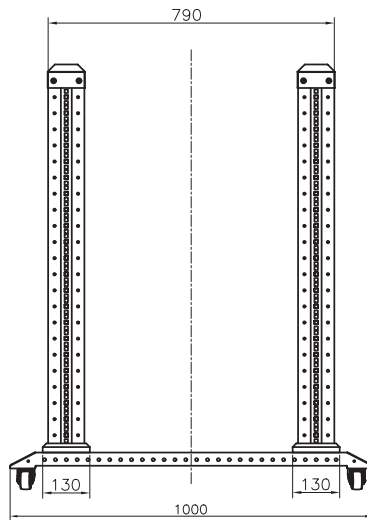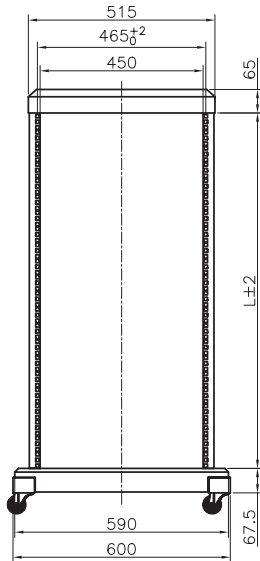

Model #	L
WO15AB	670.2
WO22AB	981.3
WO36AB	1603.6
WO45AB	2003.6

Ordering Information

Picture	Model Number	Form Factor	Dimensions (WxHxD)	
	WO15AB	15U	Width	23.62" ( 599.9 mm )
			Height	31.60" ( 802.6 mm )
			Depth	39.37" ( 1,000.0 mm )
	WO22AB	22U	Width	23.62" ( 599.9 mm )
			Height	43.85" ( 1,113.8 mm )
			Depth	39.37" ( 1,000.0 mm )
	WO36AB	36U	Width	23.62" ( 599.9 mm )
			Height	68.35" ( 1,736.1 mm )
			Depth	39.37" ( 1,000.0 mm )
	WO45AB	45U	Width	23.62" ( 599.9 mm )
			Height	84.10" ( 2,136.1 mm )
			Depth	39.37" ( 1,000.0 mm )