

BPU-124V2-SS

5.25" to 4x 2.5" SATA SAS 6 Gbps
HDD SSD Hot-swap Rack



Features

- All Aluminum Material Solid Construction for Best Heat Dissipation
- Support HDD Thickness from 9.5 to 15mm
- Plug & Play, Hot Swappable
- Built-in 2 x 40mm Cooling Fans
- LED for Power & HDD Activity
- High Performance Transfer Rate up to 6.0 Gb/s
- Support 4 x 2.5" SAS I/II (Dual Channel) & SATA I/II/III HDDs

Specifications

Model Number	Color of Main Chassis
BPU-124V2-SS	Black
RoHS Compliance	Cooling Fan
YES	2x40mm
Standard Drive Bays	Dimensions (WxHxD)
Hotswap 2.5": 4 5.25" Drives: 1 Hotswap HDD Type:	Width 5.75" (146.0 mm) Height 1.65" (41.9 mm) Depth 6.81" (173.0 mm)
2.5" SAS I/II & SATA I/II/III	
Indicators	
Power On: solid blue/ HDD Access: blue/red blinking	
Security	
Key Lock	
Material of Main Chassis	
Aluminum	


Front View




Feature View




Rear View

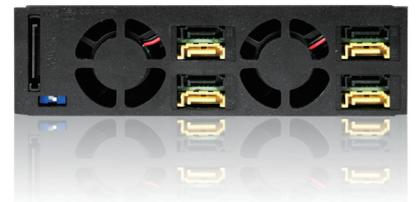

We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

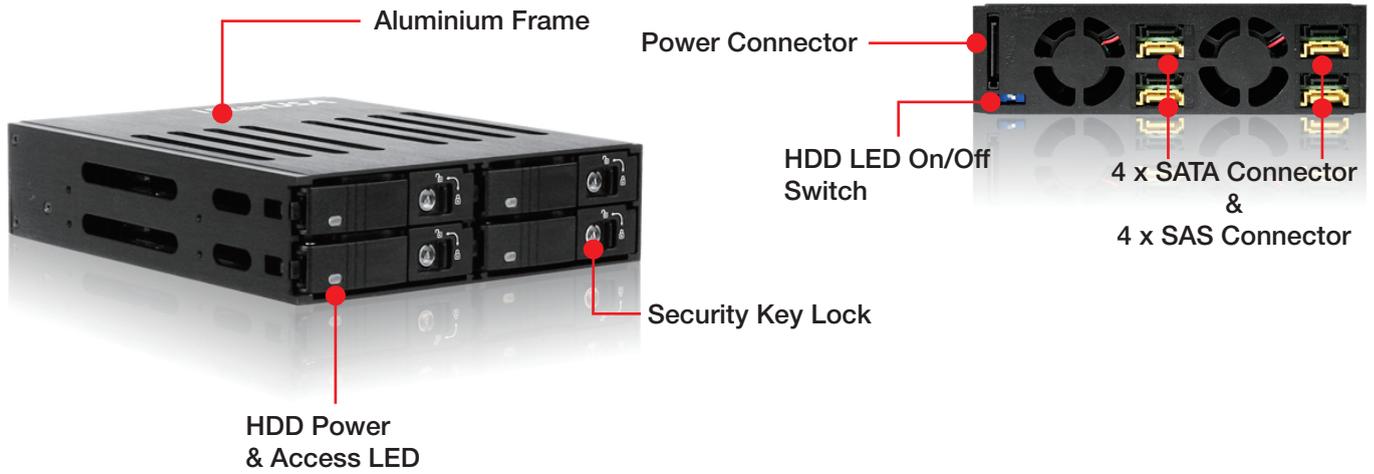

Dimensions

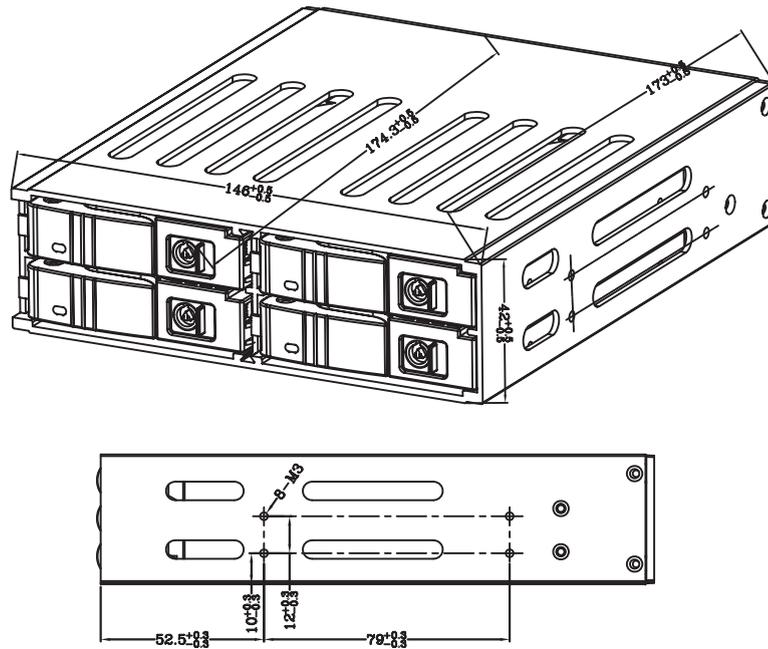

Ordering Information

Model	Description
BPU-124V2-SS	5.25" to 4x 2.5" SATA SAS 6 Gbps HDD SSD Hot-swap Rack