

BPU-2535HD

Trayless 3.5" to 2x 2.5" 12Gb/s HDD SSD Hot-swap Rack



Features

- Aluminum Frame for Best Heat Dissipation
- High Performance Transfer Rate up to 12Gb/s
- Fit One 3.5" Drive Bay for Two 2.5" Hot-swap and Trayless Drive Bays
- Energy Saving on Using 2.5" HDDs or SSD
- LED Indicators for Power & HDD access
- JBOD Support (two individual hard drives)
- Support 2.5" HDD/SSD 9.5mm thickness
- Lockable Switch That Prevents HDD From Accidentally Removed

Specifications

Model Number	Color of Main Chassis	
BPU-2535HD	Silver	
RoHS Compliance	Dimensions (WxHxD)	
YES	Width	4.00" (101.6 mm)
	Height	1.00" (25.4 mm)
	Depth	5.51" (140.0 mm)
Standard Drive Bays		
Hotswap 2.5": 2		
3.5" Drives: 1		
Hotswap HDD Type:		
2.5" SAS I/II/III & SATA I/II/III		
Indicators		
Power On: green./ HDD Accessing:green blinking		
Security		
Lockable Switch		
Material of Main Chassis		
Aluminum		

Front View





Feature View




Rear View



We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

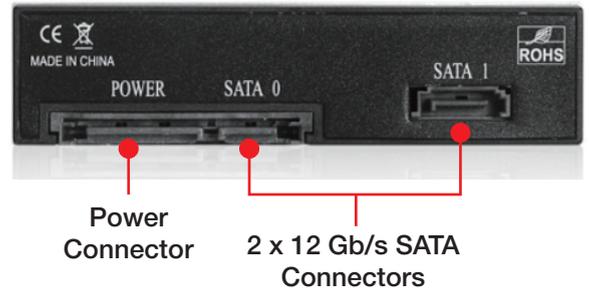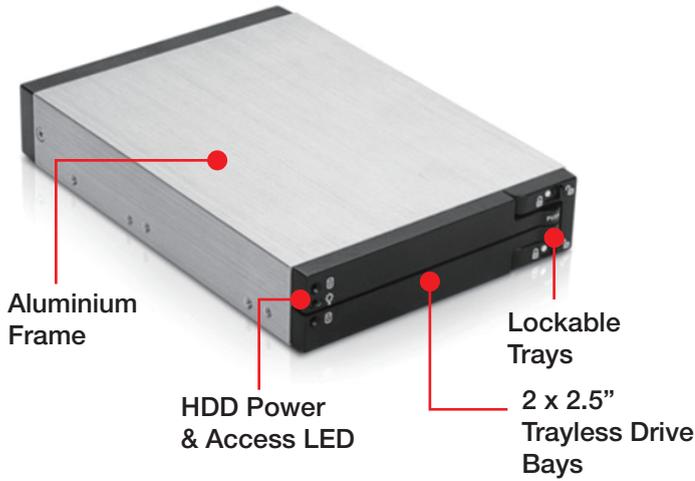

Dimensions

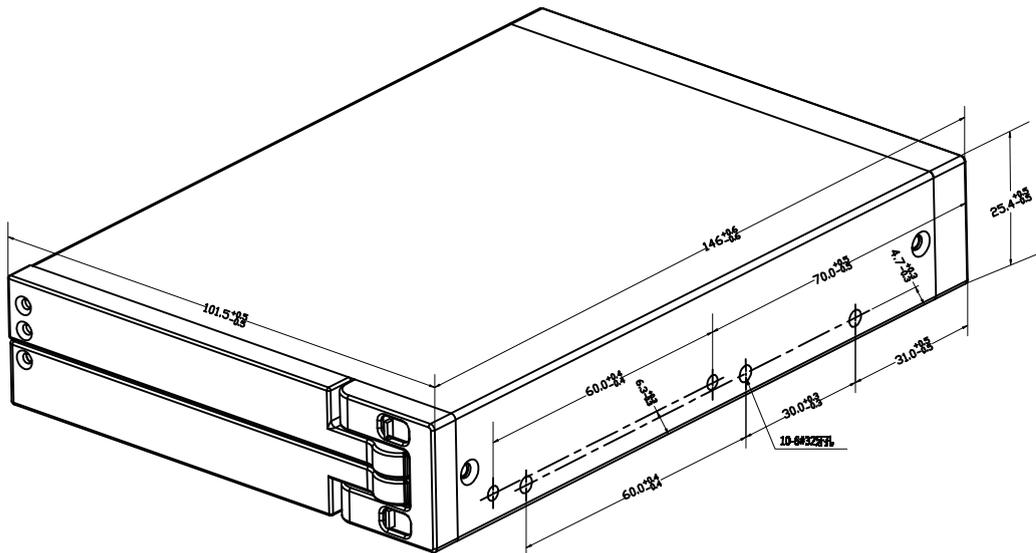

Ordering Information

Model	Description
BPU-2535HD	Trayless 3.5" to 2x 2.5" 12Gb/s HDD SSD Hot-swap Rack