

BPX-124-SA

5.25" to 4x 2.5" SATA 6 Gbps HDD SSD Hot-swap Rack



Features

- High Performance Transfer Rate Up to 6.0 Gb/s
- Compact multi-bay design to maximize the space in your workstation
- Aluminum cover for maximum durability and excellent heat dissipation
- Stylish design with scratch-resistant piano finish UV coating
- Supports 4 x 2.5" SATA HDDs/SSDs in one 5.25" drive bay
- Integrated high-speed cooling fan can effectively reduce HDD/SSD temperature
- Supports HDD/SSD Thickness from 7 mm to 12.5 mm

Specifications

Model Number	Color of Front Bezel
BPX-124-SA	Black
RoHS Compliance	Color of Main Chassis
YES	Black
Standard Drive Bays	Cooling Fan
Hotswap 2.5": 4 5.25" Drives: 1 Hotswap HDD Type:	1x40mm
2.5" SATA I/II/III	Dimensions (WxHxD)
	Width 5.75" (146.0 mm) Height 1.65" (41.9 mm) Depth 6.69" (169.9 mm)
Indicators	
Solid blue:power on./ Red blinking:HDD accessing	
Material of Front Bezel	
Plastic	
Material of Main Chassis	
Aluminum and Plastic	

Front View



Feature View




Rear View



*SSD not included




We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

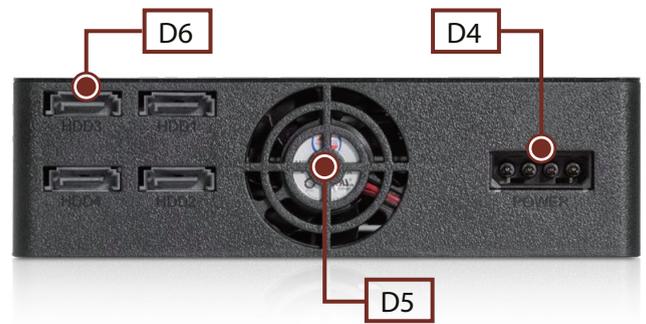

- D1**
Latch: Provides a convenient way to secure your hard disk.
- D2**
HDD access LED: Blinking red illumination for HDD access.
*Note: LED indicator might not work with some SSDs.
- D3**
HDD power LED: Solid blue illumination for HDD power on.

- D4**
4-pin Molex D-type power connector
- D5**
40mm cooling fan (4000rpm)
- D6**
4x SATA 7-pin data connectors

Dimensions

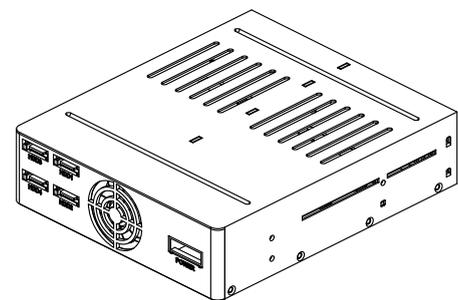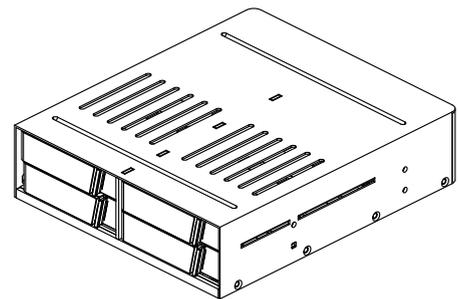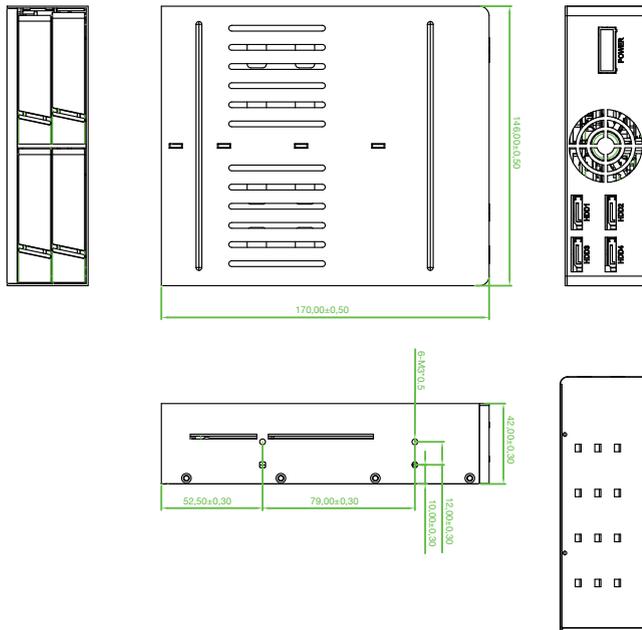

Ordering Information

Model	Description
BPX-124-SA	5.25" to 4x 2.5" SATA 6 Gbps HDD SSD Hot-swap Rack