

# D-416-B5SA

4U Compact Stylish Rackmount Chassis  
5 x 3.5" Hotswap Drives PS2 PSU



## Features

- Supports front access USB ports
- Supports standard ATX PSU
- Compatible with redundant power supplies
- 5 hot-swappable bays for 3.5" HDDs
- Supports 3.5" SAS and SATA hard drives
- Key lock front bezel to prevent unauthorized access

## Specifications

<b>Model Number</b>	<b>Supported PSU Type</b>	<b>Color of Main Chassis</b>
D-416-B5SA	PS2	Black
<b>RoHS Compliance</b>	<b>Expansion Slots</b>	<b>Front Connector</b>
YES	7	2x USB 2.0
<b>Form factor</b>	<b>Security</b>	<b>Motherboard Size</b>
4 U	Front Bezel Key Lock	12 x 9.6 (ATX, microATX)
<b>Standard Drive Bays</b>	<b>Material of Front Bezel</b>	<b>Optional Fan:</b>
3.5" Drive (internal): 2 5.25" Drives: 3 Hotswap 3.5": 5	Aluminum	80mm x2, 60mm x2
<b>Hotswap HDD Type:</b>	<b>Material of Handle</b>	<b>Dimensions (WxHxD)</b>
3.5" SAS I/II & SATA I/II/III	Aluminum	Width 19.00" ( 482.6 mm ) Height 7.00" ( 177.8 mm ) Depth 21.77" ( 553.0 mm )
<b>Indicators</b>	<b>Material of Main Chassis</b>	
Power, HDD	Galvanized Steel	
<b>Switches</b>	<b>Color of Front Bezel</b>	
Power, Reset	Black	

## Front View



## Inside View




## Rear View



We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

**Dimensions**

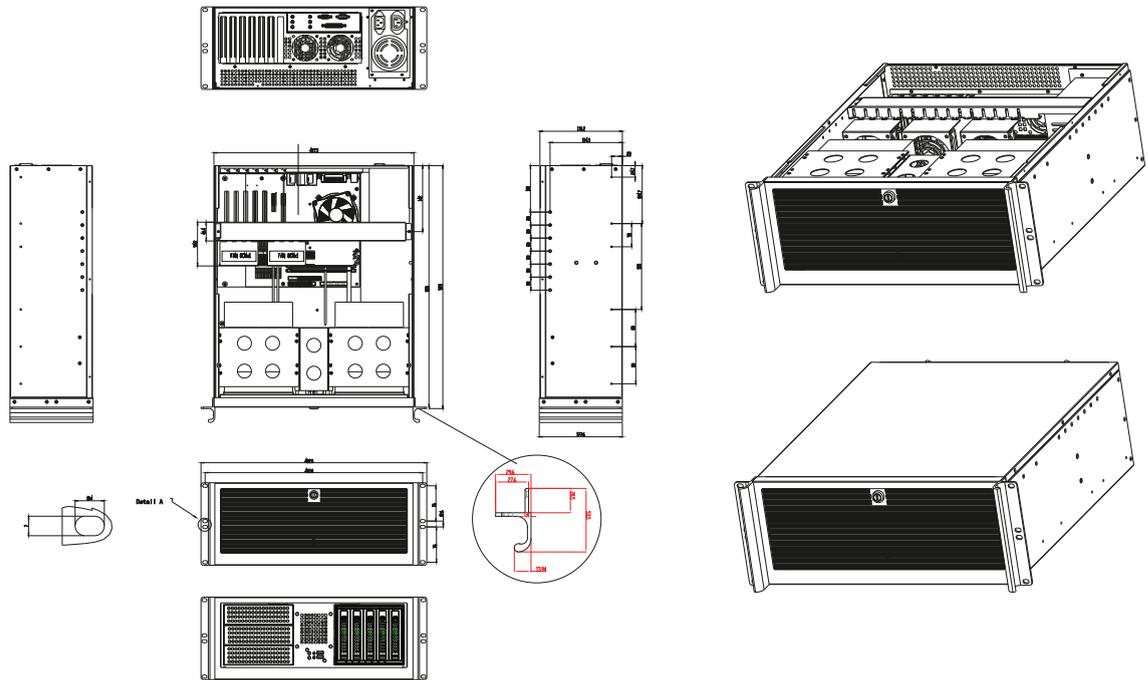

**Ordering Information**

Model	Description
D416-B5BK	D-416-B5SA with Black HDD Handle
D416-B5PL	D-416-B5SA with Lockable HDD Handle

**Compatible Power**

PSU Model	Description
IS-400R8P	IS 400w x 2 redundant
IS-550R8P	Mini 550w Redundant

**Optional Accessories**

Category	Model
Drive Cage	BPN Trayless Drive Cage Ser
	BPU Tray Drive Cage Seriesies
Sliding Rail Kit	TC-RAIL Series Sliding Rail Kit