

# IS-1500RH1UP

## 1500W 1U Redundant Power Supply



### Features

- Universal Input, Active PFC
- MTBF > 100,000 Hours
- SCP (Short Circuit Protection)
- OCP (Over Current Protection)
- OVP (Over Voltage Protection)
- OPP (Over Power Protection)
- Power Failure Alarm & Signals
- Efficiency: 75% at Full Load
- Industrial Japanese Components 40 degrees temperature
- Automatic Fan Thermal Control

### Specifications

Model Number	Efficiency
IS-1500RH1UP	75%
RoHS Compliance	Connector Type
YES	Main Connector :: 24 pin/ 4pin 12V :: 1/ 8pin EPS 12V :: 1/ Molex :: 30 SATA :: 2/ Floppy :: 7/
Output Wattage	Dimensions (WxHxD)
1500	Width 16.61" ( 421.9 mm ) Height 1.69" ( 42.9 mm ) Depth 13.39" ( 340.1 mm )

### Front View



### Side View




### Rear View



We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

Dimensions

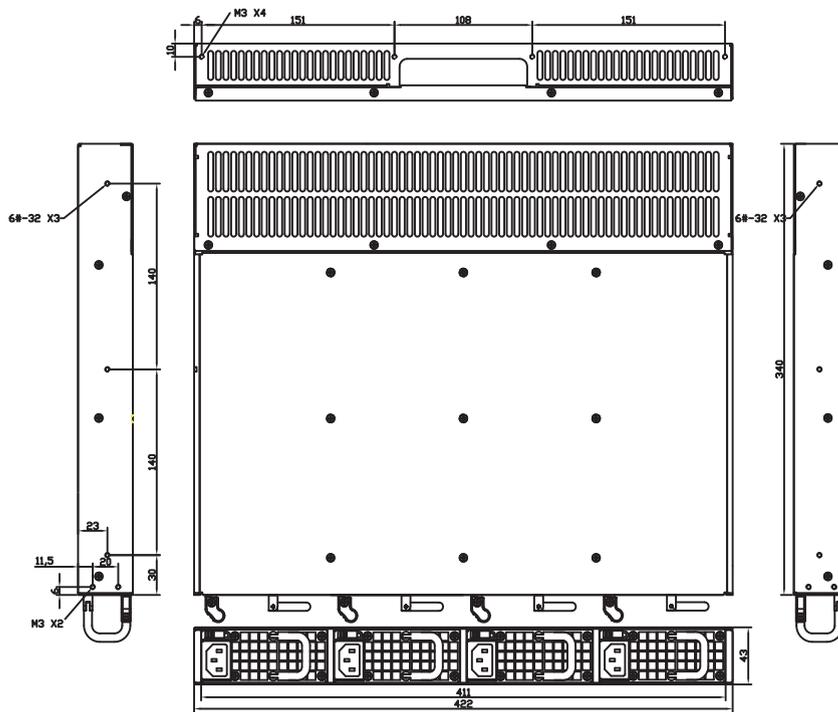

Compatible Chassis

\* Please visit our website [www.istarusa.com/en/xeal](http://www.istarusa.com/en/xeal) for a full list of compatible chassis

Output Rating

Output Voltage	+5V	+3.3V	+12V	-5V	-12V	+5VSB
Max. Load	60A	60A	122A	0.5A	0.8A	3A
Min. Load	1A	1A	2A	0A	0A	0.1A
Max. Combined	440W					
Total Output	1475W			2.5W	9.6W	15W