


# IS-300RSH1UP

300W 1U Redundant 1+1 Power Supply

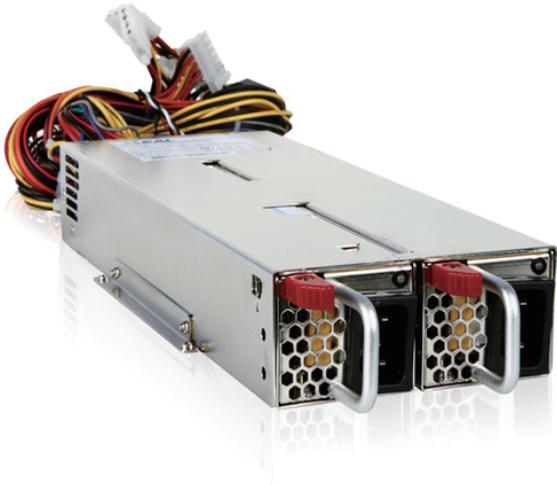

## Features

- Active PFC, Power Factor  $\geq 0.95$
- Hold up Time: 16ms at 80% Load
- 5 Output Rails
- Front Access Ability
- Power Failure Alarm
- Over Current Protection
- Over Voltage Protection
- Short Circuit Protection

## Specifications

<b>Model Number</b>	<b>Efficiency</b>
IS-300RSH1UP	80%
<b>RoHS Compliance</b>	<b>Connector Type</b>
YES	Main Connector :: 24 pin/ 4pin 12V :: 1/ 8pin EPS 12V :: 1/ Molex :: 2 SATA :: 4/ Floppy :: 1
<b>Output Wattage</b>	<b>Dimensions (WxHxD)</b>
300	Width 4.17" ( 105.9 mm ) Height 1.63" ( 41.4 mm ) Depth 10.63" ( 270.0mm )

## Front View



## Side View











## Rear View



We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

## Dimensions

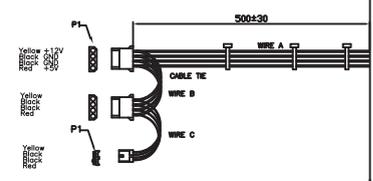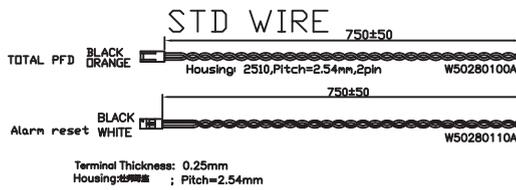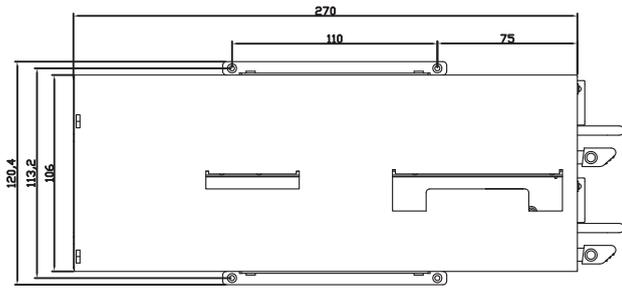

## Compatible Chassis

\* Please visit our website [www.istarusa.com/en/xeal](http://www.istarusa.com/en/xeal) for a full list of compatible chassis

## Output Rating

Output Voltage	+5V	+3.3V	+12V	-12V	+5VSB
Max. Load	20A	20A	24A	0.5A	2A
Min. Load	1A	1A	2A	0A	0.1A
Max. Combined	120W				
Total Output	284W			6W	10W