

# IX-550R2UPD8

550W 2U High Efficiency Redundant Power Supply



## Features

- Universal Input, Active PFC
- MTBF > 100,000 Hours
- Power Failure Alarm & Signals
- High Efficiency 82% minimum
- PMBus Support
- OPP (Over Power Protection)
- OVP (Over Voltage Protection)
- OCP (Over Current Protection)
- SCP (Short Circuit Protection)


## Specifications

Model Number	Efficiency
IX-550R2UPD8	82%
RoHS Compliance	Connector Type
YES	Main Connector :: 20+4 pin/ 4+4pin 12V :: 1/ 8pin EPS 12V :: 1/ 6+2 Pin PCIE :: 1 Molex :: 10/ SATA :: 4/ Floppy :: 2/ 6pin PCIE :: 1
Output Wattage	Dimensions (WxHxD)
550	Width 3.45" ( 87.6 mm ) Height 3.31" ( 84.1 mm ) Depth 8.54" ( 216.9mm )

## Front View



## Side View

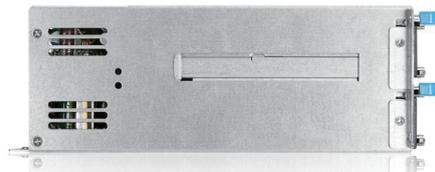


## Rear View



We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

Dimensions

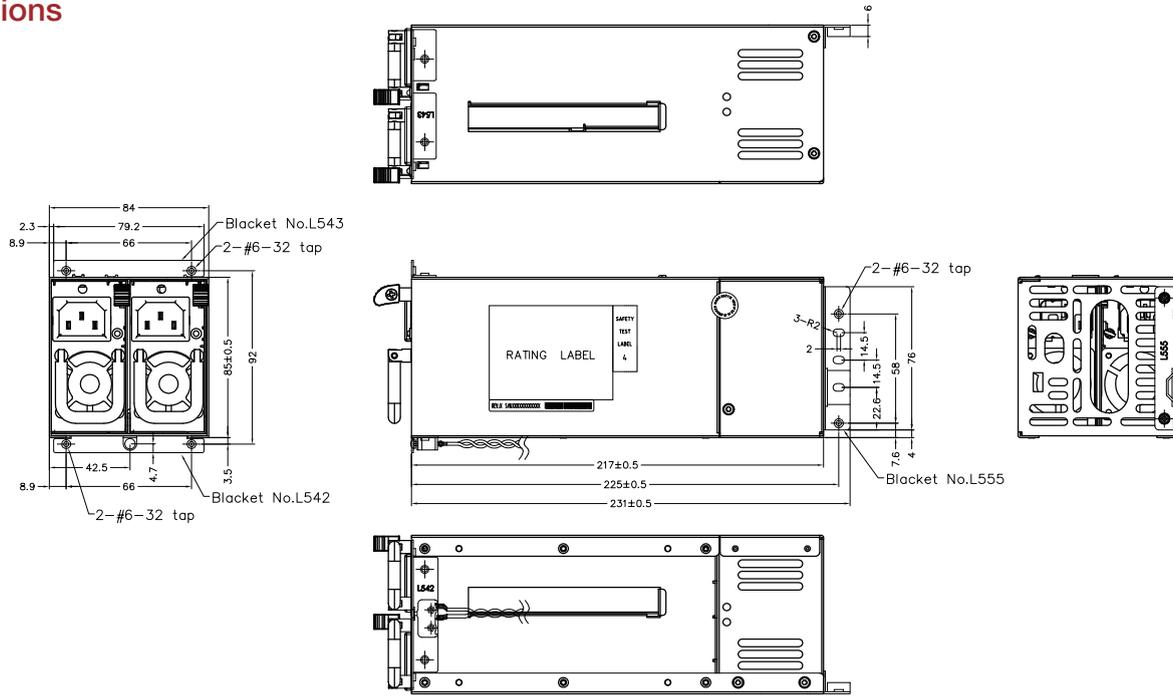

Compatible Chassis

\* Please visit our website [www.istarusa.com/en/xeal](http://www.istarusa.com/en/xeal) for a full list of compatible chassis

Output Rating

Voltage	Minimum Load	Maximum Continuous Load
+3.3V	0.5A	20A
+5V	0.5A	20A
+12V	1A	45A
-12V	0A	0.5A
+5V SB	0.1A	2.5A