



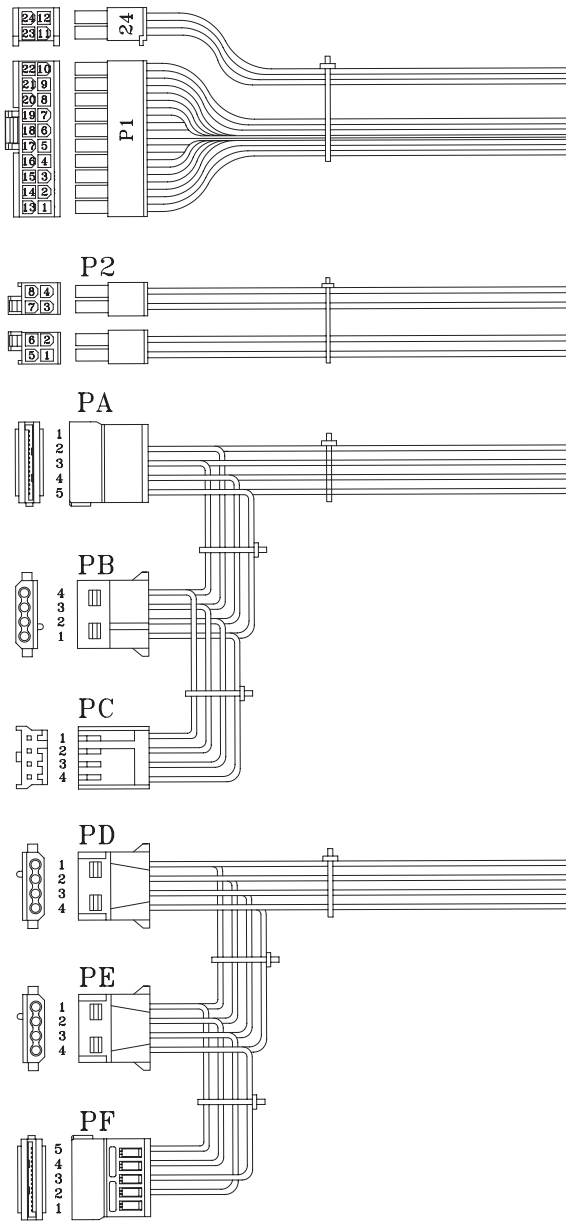

NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01]

UNIT:mm [inch]

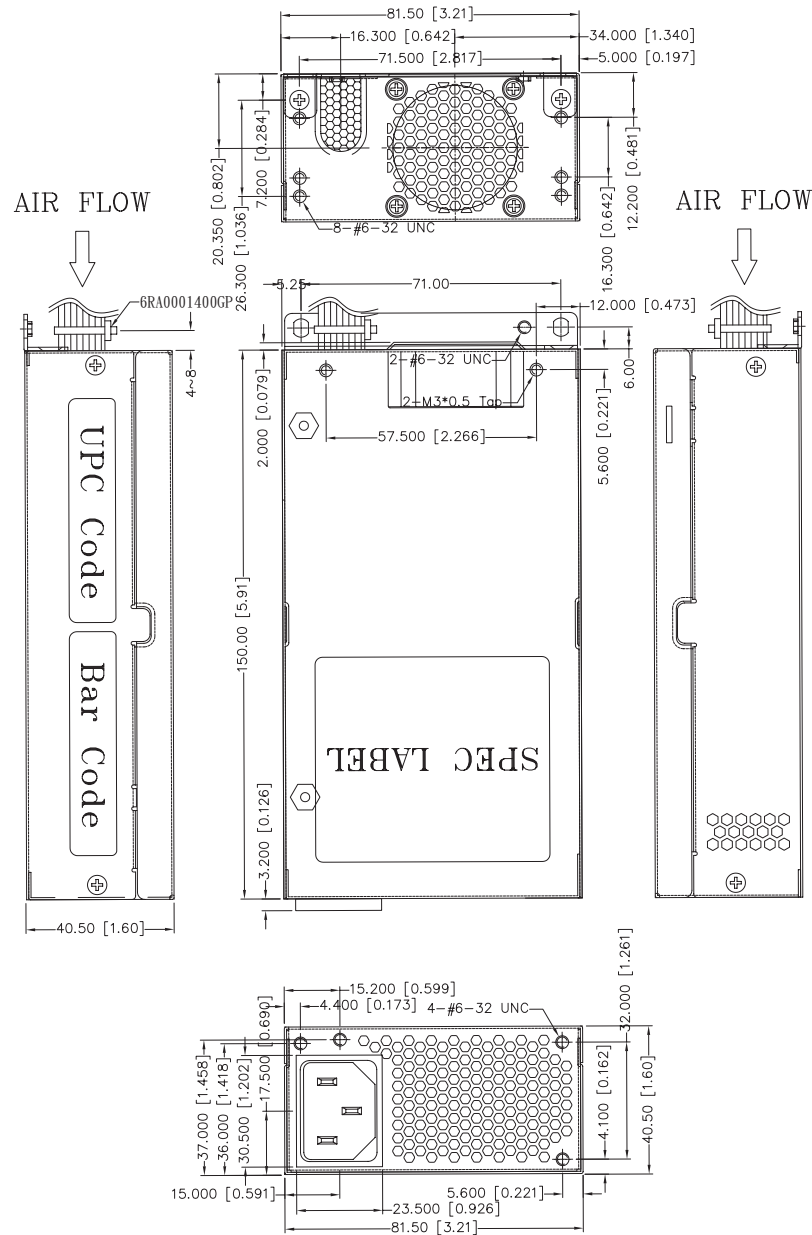

REF. D.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	LENGTH
P1 / 24	1	+3.3V	ORANGE	20	WST P20-142002K11D or EQUIV.	210±15 mm
	2	+3.3V	ORANGE	20		
	3	COM	BLACK	20		
	4	+5V	RED	20		
	5	COM	BLACK	20		
	6	+5V	RED	20		
	7	COM	BLACK	20		
	8	PW-OK	GRAY	24		
	9	+5Vb	PURPLE	20		
	10	+12V	YELLOW	20		
	11	+12V	YELLOW	20		
	12	+3.3V	ORANGE	20		
	13	+3.3V	ORANGE	20		
	14	+3.3Vb	BROWN	24		
	15	-12V	BLUE	24		
	16	COM	BLACK	20		
	17	PS-ON	GREEN	24		
	18	COM	BLACK	20		
	19	COM	BLACK	20		
	20					
	21	+5V	RED	20		
	22	+5V	RED	20		
	23	+5V	RED	20		
	24	COM	BLACK	20		
P2	1	COM	BLACK	20	P4-142002K3B or EQUIV.	310±15 mm
	2	COM	BLACK	20		
	3	COM	BLACK	20		
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		
	6	+12V	YELLOW	20		
	7	+12V	YELLOW	20		
	8	+12V	YELLOW	20		
PA	1				MOLEX SD-87582-001 or EQUIV.	310±15 mm
	2	COM	BLACK	20		
	3	+5V	RED	20		
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		
PB / PE	1	+12V	YELLOW	20	WST P4-A10202 or EQUIV.	155±10 mm
	2	COM	BLACK	20		
	3	COM	BLACK	20		
	4	+5V	RED	20		
PC	1	+5V	RED	20	AMP 171822-4 or EQUIV.	155±10 mm
	2	COM	BLACK	20		
	3	COM	BLACK	20		
	4	+12V	YELLOW	20		
PD	1	+12V	YELLOW	20	WST P4-A10202 or EQUIV.	310±15 mm
	2	COM	BLACK	20		
	3	COM	BLACK	20		
	4	+5V	RED	20		
PF	1				MOLEX SD-87582-001 or EQUIV.	155±10 mm
	2	COM	BLACK	20		
	3	+5V	RED	20		
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		

MODEL NO. : TC-1U30FX8

TITLE:

SHEET: 1 OF 1 REV:01

R&D(2)
(78.41)

PE

DRAWN
周書宇

DATE
FEB.07.2020

INTERIOR COUNTERSIGN: