

IS-960S2UPD8

960W 2U High Efficiency Redundant Power Supply



Features

- Universal Input, Active PFC
- High Efficiency 80% minimum
- Power Failure Alarm & Signals
- OPP (Over Power Protection)
- OVP (Over Voltage Protection)
- OCP (Over Current Protection)
- SCP (Short Circuit Protection)

Specifications

Model Number	Efficiency
IS-960S2UPD8	Min 80%
RoHS Compliance	Connector Type
YES	Main Connector :: 24 pin/ 4pin 12V :: 1/ 8pin EPS 12V :: 2/ Molex :: 6 SATA :: 2/ Floppy :: 2
Output Wattage	Dimensions (WxHxD)
960	Width 3.98" (101.1 mm) Height 3.31" (84.1 mm) Depth 11.81" (300.0 mm)


Front View



Side View





Rear View

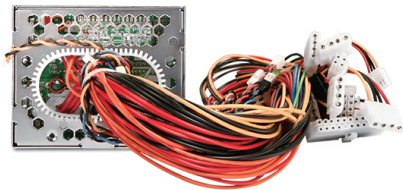

We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

Dimensions

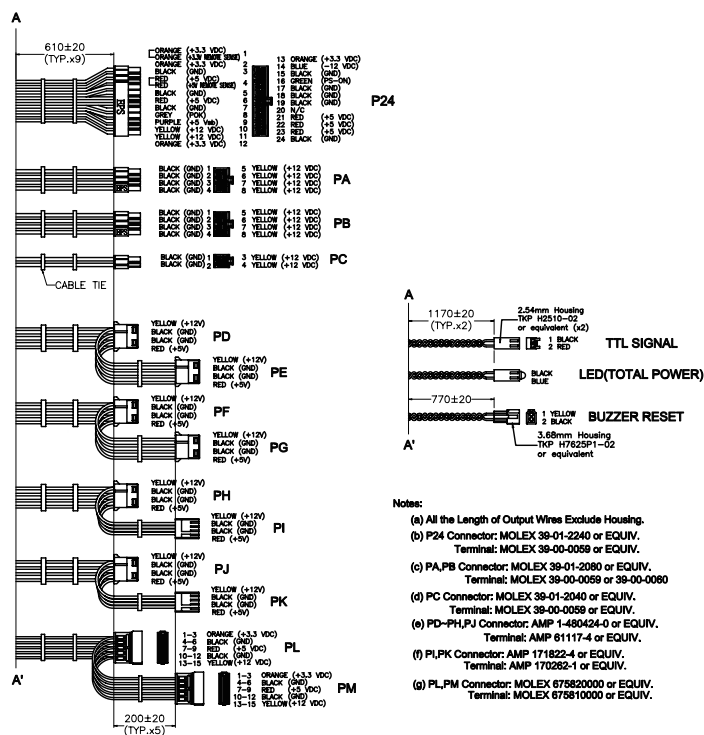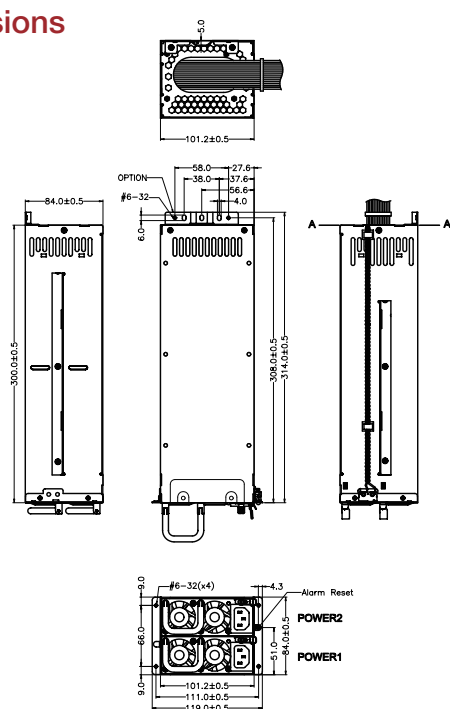

Compatible Chassis

* Please visit our website www.istarusa.com/en/xeal for a full list of compatible chassis

Optional Accessories

Accessory	Description
IS-600P	600W 1U/2U Redundant Power Supply Module for IS-600S2UP/ IS-1800RH1UP

Output Rating

Output Voltage	+5V	+3.3V	+12V	-5V	-12V	+5VSB
Max. Load	32A	32A	78A	0.5A	0.8A	3.5A
Min. Load	0.5A	0.5A	2A	0A	0A	0.1A
Max. Combined	190W					
Total Output	960W			2.5W	9.6W	17.5W